

Product Model No. : LK WASH S 50C
Product Description : 50W LED Wash Light

50W LED Wash Light

Facade Lighting breathes life into unique facades & architecture in private or public spaces. it can also be used to add an artistic feel to the exteriors with shadows, also use up-lighting for pillars and columns to add a simple contrast or to accentuate the object for making it the centre of attraction.



Technical Specifications:

Electrical & Power:

- Power Consumption : 50W
- Input Power : DC 24V

Optical Arrangement:

- Beam Angle : 25°
- Optional Beam Angle : 15° , 45°
- Field Angle : 32°

Lamp Source:

- LED Source : SMD Based
- Colour Temperature : RGBW
- Lumens/W : > 55
- Net Luminous Flux : 2750
- LED Power : 4W
- No of LED's : 18 No's
- LED Hours Burning life : 50,000

Control & Others:







- Control Option : DmX 512
- DmX Channels : 4 DmX Channels
- Working Temperature : +55° ~ -30°

Physical & Construction:

- Dimension : 250 x 225 x 125 mm
- Ingress Protection : IP65 Rated
- Body Housing : Aluminium Die Casted
- Body Colour : Black/ Grey/ Custom
- Mounting Type : Yoke Mount
- Impact Resistance : IK07
- Cooling : Passive Cooling System
- Protection Class : III Class
- Weight : 2.35 Kgs / 5.18 lbs






Features:

Consumption	Control	Lamp Source	Beam Angle	CC Temp.	IP Rating
 50W	 DMX 512	 LED SMD	 25°	 RGBW	 IP65



Photometry Readings:

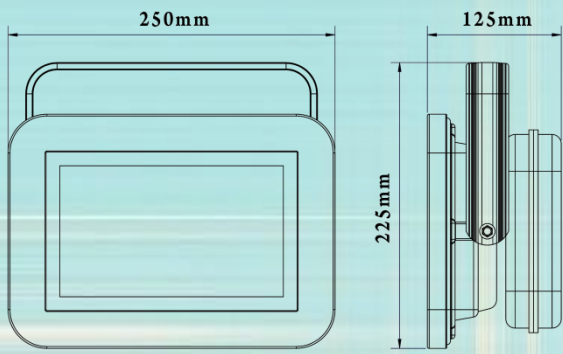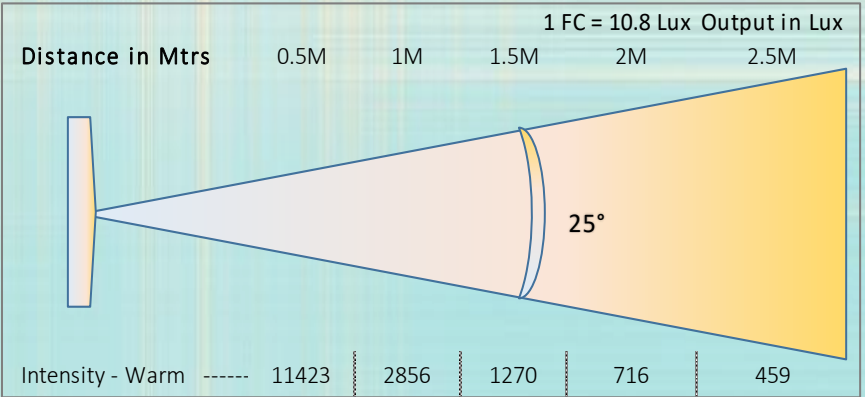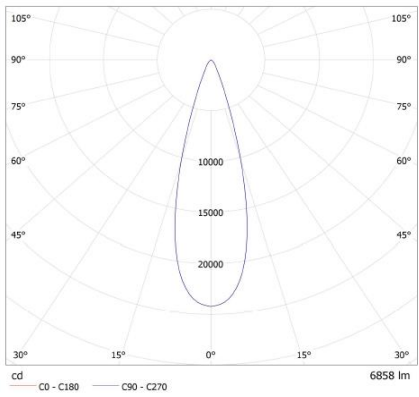

- Available Models:**
- LK WASH S 100C
 - LK WASH S 180C
 - LK WASH S 160C
 - LK WASH D 160C
 - LK WASH D 260C
 - LK WASH D 320C

Available Beam Angle:

